


HELIX II HX01

STANDARD	NIJ 0101.06
NIJ MODEL	UG2F06
SERIES	HX01
THREAT LEVEL	II
GENDER	Male
AREAL DENSITY	0.80 psf
THINNESS	0.18"
PLY COUNT	31
SIZE RANGE	C1-C5
COMPOSITION	Goldshield®/ Spectra Shield® Hybrid
STITCHING	Shoulder Tack, bottom stitch
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years



Honeywell

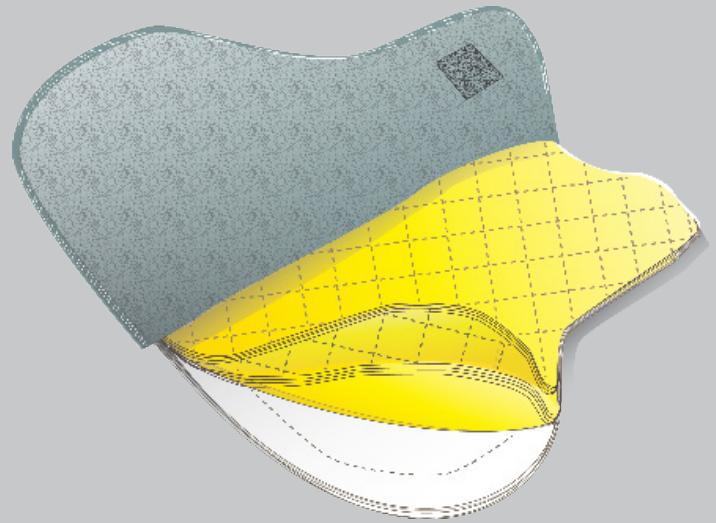

BALLISTIC PERFORMANCE AT CERTIFICATION*

9mm New V50	1748 fps	.357 Mag New V50	1648 fps
9mm Conditioned V50	1683 fps	.357 Mag Conditioned V50	1625 fps
9mm BFS	29.8 mm	.357 Mag BFS	34.4 mm
9mm New RPI	2106.0	.357 Mag New RPI	1985.5
9mm Conditioned RPI	2027.7	.357 Mag Conditioned RPI	1957.8

Please contact your authorized PSP representative to discuss your ballistic requirements.

Information contained in this document is subject to material tolerances and test facility conditions. Specifications and/or products shown are subject to change without notice and may differ from the illustrative depictions. Full technical details / specifications are available upon request.

PACSAFETY.COM

CustomerCare.PSP@Safariland.com | Toll Free: 1-888-997-9923

SAFARILAND[®]