


# HELIX II HX02

STANDARD	NIJ 0101.06
NIJ MODEL	GPAIL-2
SERIES	HX02
THREAT LEVEL	II
GENDER	Male
AREAL DENSITY	0.74 psf
THINNESS	0.19"
PLY COUNT	29
SIZE RANGE	C1-C5
COMPOSITION	Kevlar®/Goldshield®/ Spectra Shield® Hybrid
STITCHING	Diamond Quilt, Shoulder Tack
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

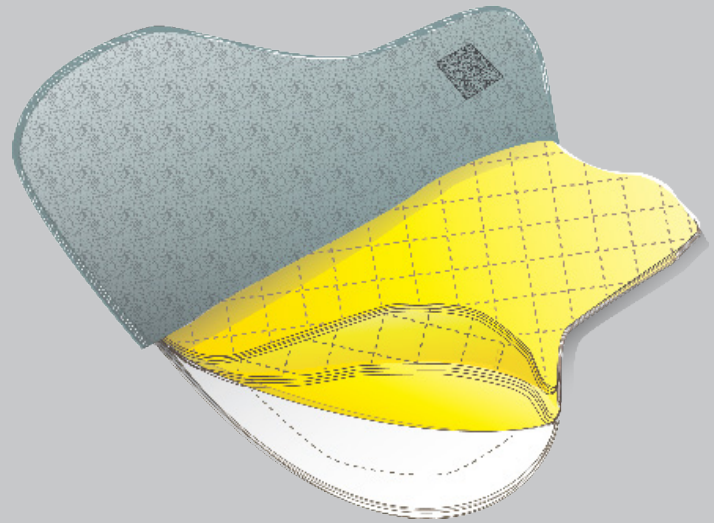

## BALLISTIC PERFORMANCE AT CERTIFICATION\*

9mm New V50	1673 fps	.357 Mag New V50	1635 fps
9mm Conditioned V50	1573 fps	.357 Mag Conditioned V50	1659 fps
9mm BFS	34.2 mm	.357 Mag BFS	37.0 mm
9mm New RPI	2144.9	.357 Mag New RPI	2096.2
9mm Conditioned RPI	2016.7	.357 Mag Conditioned RPI	2126.9

## SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | .357 SIG 125gr GDHP

Special threat testing conducted at NIJ certified independent laboratory

Please contact your authorized PSP representative to discuss your ballistic requirements.

Information contained in this document is subject to material tolerances and test facility conditions. Specifications and/or products shown are subject to change without notice and may differ from the illustrative depictions. Full technical details / specifications are available upon request.

[PACSAFETY.COM](http://PACSAFETY.COM)

CustomerCare.PSP@Safariland.com | Toll Free: 1-888-997-9923

SAFARILAND®