


# LITEX IIIA LX02



STANDARD	NIJ 0101.06
NIJ MODEL	GPBIIIA-2
SERIES	LX02
THREAT LEVEL	IIIA
GENDER	Neutral
AREAL DENSITY	1.16 psf
THINNESS	0.27"
PLY COUNT	28
SIZE RANGE	C1-C5
COMPOSITION	Twaron®/Goldflex® Hybrid
STITCHING	Diamond Quilt, Perimeter Stitch, Shoulder Tack, Bottom Stitch,
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

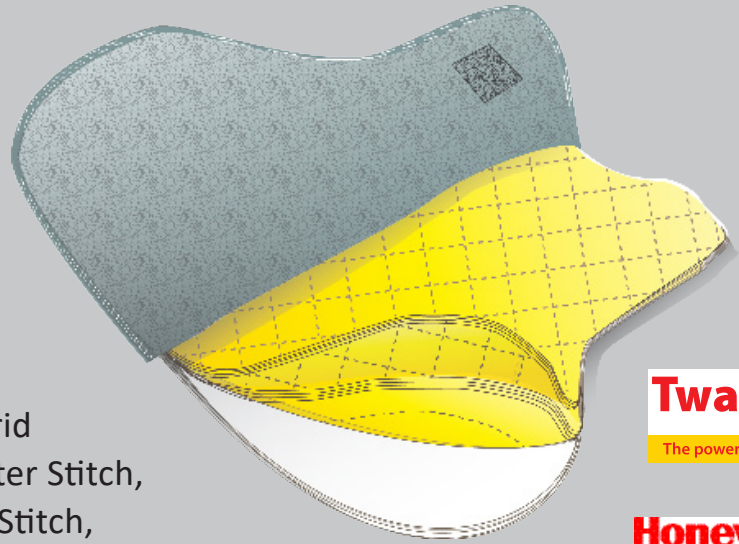

## BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1856 fps	.44 Mag New V50	1643 fps
.357 Sig Conditioned V50	1766 fps	.44 Mag Conditioned V50	1560 fps
.357 Sig BFS	28.9 mm	.44 Mag BFS	39.0 mm
.357 Sig New RPI	1600.0	.44 Mag New RPI	1416.4
.357 Sig Conditioned RPI	1522.4	.44 Mag Conditioned RPI	1344.8

## SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | .357 SIG 125gr GDHP | 5.7 x 28mm FN SS197SR 40gr

Special threat testing conducted at NIJ certified independent laboratory

Information contained in this document is subject to material tolerances and test facility conditions. Specifications and/or products shown are subject to change without notice and may differ from the illustrative depictions. Full technical details / specifications are available upon request.

[PACSAFETY.COM](http://PACSAFETY.COM)

CustomerCare.PSP@Safariland.com | Toll Free: 1-888-997-9923

