


LITEX II LX02

STANDARD	NIJ 0101.06
NIJ MODEL	GPBII-2
SERIES	LX02
THREAT LEVEL	II
GENDER	Neutral
AREAL DENSITY	.90 psf
THINNESS	0.22"
PLY COUNT	21
SIZE RANGE	C1-C5
COMPOSITION	Twaron®/Goldflex® Hybrid
STITCHING	Diamond Quilt, Perimeter Stitch, Shoulder Tack, Bottom Stitch,
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented Internal Material
WARRANTY	5 Years

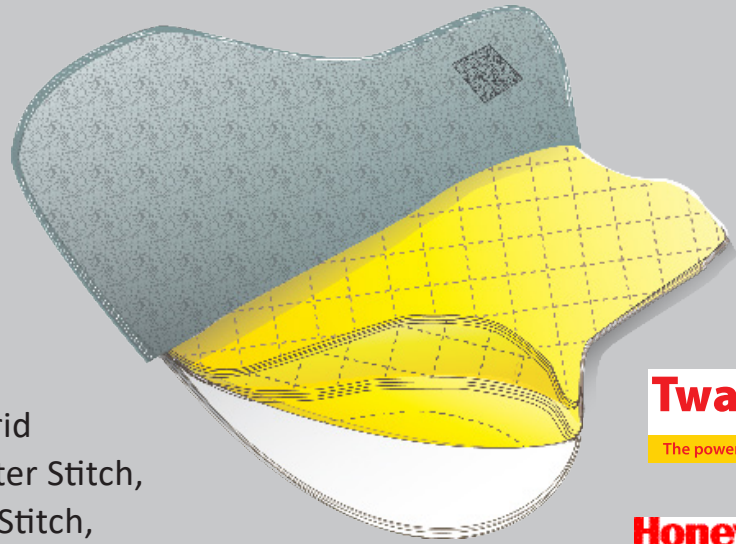

Twaron®
The power of Aramid

Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1683 fps.	.357 Mag New V50	1644 fps.
9mm Conditioned V50	1614 fps.	.357 Mag Conditioned V50	1613 fps.
9mm BFS	30.8 mm	.357 Mag BFS	33.8 mm
9mm New RPI	1870.0	.357 Mag New RPI	1826.7
9mm Conditioned RPI	1793.3	.357 Mag Conditioned RPI	1792.2

SPECIAL THREAT TESTING

SPECIAL THREAT TESTED: 9MM 127GR SXT AND 357 SIG 125GR GDHP

Special threat testing conducted at NIJ certified independent laboratory

Information contained in this document is subject to material tolerances and test facility conditions. Specifications and/or products shown are subject to change without notice and may differ from the illustrative depictions. Full technical details / specifications are available upon request.

PACSAFETY.COM

CustomerCare.PSP@Safariland.com | Toll Free: 1-888-997-9923

SAFARILAND®