

Technical Specifications Model Assault III LW Type III Ballistic Shield





Part Number	Size	Coverage	Weight	Thinness	
Horizontal Handle					
1362601	20" W x 36" L (50.8cm x 91.4cm)	601 in ² (3,877 cm ²)	20.4 lbs. (9.25 kg)	0.578" (14.7mm)	
3P Handle					
1362603	20" W x 36" L (50.8cm x 91.4cm)	601 in ² (3,877 cm ²)	22.2 lbs. (10.07 kg)	0.578" (14.7mm)	
FoxFury® B70 Integrated Horizontal Handle 1200 Lumens					
1362602	20" W x 36" L (50.8cm x 91.4cm)	601 in ² (3,877 cm ²)	22.0 lbs. (9.98 kg)	0.578" (14.7mm)	

NIJ Standard 0108.01 with NIJ0101.06 Shot Protocol Type III

UHMWPE Composite Ultra-lightweight PE material with chemical resistant characteristics Structure - Flat Ambidextrous Handle

Viewport Design

Glass/ Polycarbonate Size – 5" L x 7" W (12.7 cm x 17.8 cm) Trapezoid Viewing area for increased vertical visibility

Standard Accessories

November 15, 2023

"Approved for Public Release"

Forearm Pad
Forearm Strap
1001817 - POLICE Decal - 13" L x 4" W (33 cm x 10 cm)
1001818 – SHERIFF Decal – 13" L x 4" W (33 cm x 10 cm

Optional Accessories

1184578 – Shield Support Hook Attachment 1002756 – Shield Carry Bag 26x36 tall 1002757 – Shield Hood – Medium 13.5x23 1355021 – Assault Viewport Lens 3 Layer Tear Off Kit 1186181 - FoxFury® Taker B50[™] Light w/ 1000 Lumens 1314778 - FoxFury® Taker B30[™] Light w/ 1000 Lumens 1314777 – FoxFury® Taker B10[™] Light w/ 380 Lumens

BALLISTIC PERFORMANCE

Includes Bolts and Viewport being shot.


Tested Rounds	6 Impacts minimum			
5.56 x 45mm, 55 gr. M193	3200 fps ± 30 fps (975 m/s ± 9 m/s)			
7.62 x 39mm, 123 gr. Mild Steel Core	2380 fps ± 30 fps (725 m/s ± 9m/s)			
7.62 x 51mm, 147 gr. NATO (M80)	2750 fps ± 50 fps (838 m/s ± 15 m/s)			
SHOT LOCATIONS				
• 1 - Viewport				
2 - Transition shot between viewport and ballistics				
• 3 - Bolt – Direct Hit				
• 4 - Bolt – Side of Bolt – down the threads of the bolt				
• 5 - 100mm (3.94") – 3 shot cluster				
6 - 3 shots in a direct line				
Shots 1 and 2 are the outside shots (6-1 and 6-2)				
Shot 3 is in between these two shots (6-3)				
• 7 - 30-degree angle shot				
• 8 - 1" edge shot				

(see diagram below for shot locastions)

"Approved for Public Release"



Diagram for Shot Locations.

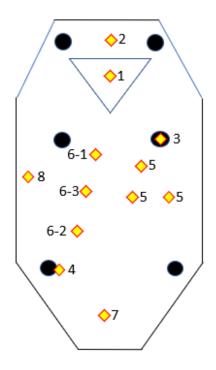

WARNING WARNING: This product can expose you to chemicals including Methylene chloride, BPA, Lead, Acrylonitrile, Ethyl Acrylate, Formaldehyde, or Methanol, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

"Approved for Public Release"

safariland.com/hardarmor 800.347.1200 (U SA ONLY) OR 909.923.7300 | FAX 909.923.7400

A BRAND OF THE SAFARILAND GROUP TOGETHER, WE SAVE LIVES*